


FUHO

5 Megapixel IP Camera

FIM - T I650

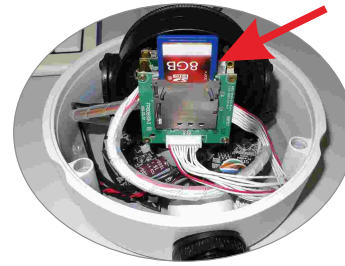

ONVIF


Features

- 5-megapixel CMOS Sensor
- Real-time H.264, MPEG-4 and MJPEG Compression (Triple Codec)
- Simultaneous Multiple Streams
- Built-in SD/SDHC Card Slot for On-board Storage (Optional)
- Built-in high sensitive microphone (Optional)
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability
- Supports H/W Watchdog
- Vandal-Resistant case design

	E-MAIL
	2592x1920
	POE
	IP66
	MIC

OPTIONAL

System Application Chart

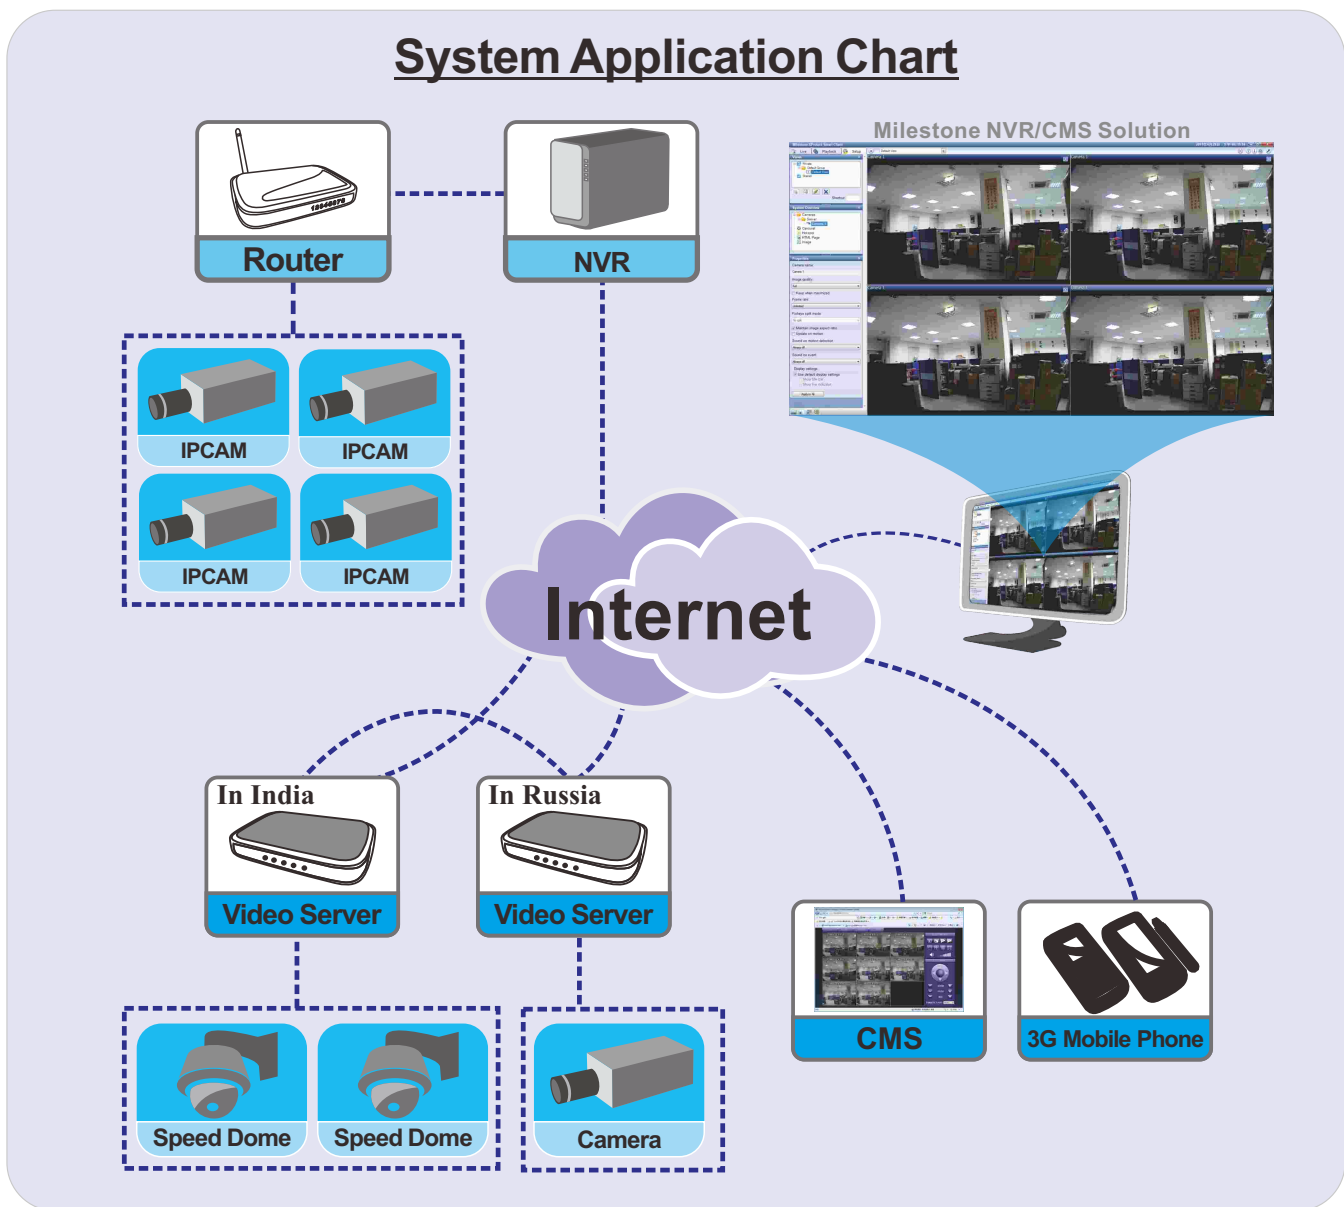



FUHO 5 Megapixel IP Camera

FIM - T I650

Specification

System	CPU: TI DM365 SoC Flash: 32MB RAM: 128MB	
Image Sensor	HIGH QUALITY 5-MEGAPIXEL 1/2.5"CMOS	
Lens	1/2" 3.5mm~9mm F1.6	
Video	H.264: 30 fps at 1280x720 , Highest Resolution: 8 fps at 2592x1920	
	MPEG4: 30 fps at 1280x720 , Highest Resolution: 8 fps at 2592x1920	
	MJPEG: 30 fps at 1280x720 , Highest Resolution: 8 fps at 2592x1920	
	Compression: H.264, MPEG-4 & MJPEG Streaming:	
	Triple Codec (H.264 、 MPEG-4 、 JPEG) Selectable	
	Support Simultaneous multiple streams	
	BNC connector for video output ; NTSC/PAL video output switch	
Image Settings	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	Configurable brightness, contrast, saturation, sharpness, white balance and exposure	
	AGC 、 AWB 、 AES 、 BLC	
Audio (Optional)	Format	MPEG-4 AAC audio encoding
		G.711 audio encoding
	Built-in high sensitive microphone with 5M maximum audible area. Supports audio mute	
Networking	INTERFACE	10/100 Mbps Ethernet, RJ-45
	SUPPORTED PROTOCOL	IPv4, TCP/IP, DHCP, HTTP, FTP, SMTP, RTSP, SNTP, DNS
	SUPPORTED BROWSER	Microsoft Internet Explorer 6.0 or above
Alarm And Event Management	Motion Detection	
	Event notification using SMTP, or FTP	
Users	16 clients on-line monitoring at the same time	
	Multi-level user access control with password protection	
Maintenance	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1, Power connection x 1, SD-card slot x 1 (Optional)	
Power	DC12V 、 AC24V 、 PoE	
Weight	About 892 g	
Dimensions	W: Φ145mm H: 108.2mm	
Operating	Temperature: 0 ~ 45 °C	
IP	IP66	
Environments	Humidity: 90%	