



FUHO

IP CAMERA


IP-903



FEATURES

- ▶ Network : IP Configure
- ▶ Video Setting : Resolution, Frame Rate, Compression Rate, P/I Rate
- ▶ Network Protocol : TCP/UDP/IP, DHCP,SMTP, HTTP, NTP,DDNS,FTP,TFTP,ARP,nPn,PPPoE
- ▶ Transmission Format:MPEG-4 video stream with 1 way PCM audio
- ▶ Support the IE5.0 or the above version.
- ▶ Volume control: Audio on/off
- ▶ Support 1-way audio and the working distance of the built-in MIC can reach 5M.
- ▶ The maximum users online via PC are up to 10; and online via RTSP mobile phone are up to 5.
- ▶ Both connections allow users online at the same time but the image quality is depending on your bandwidth.
- ▶ Support the RTSP mobile phone and don't support the JAVA mobile phone.


DIAGRAM OF INSTALLATION

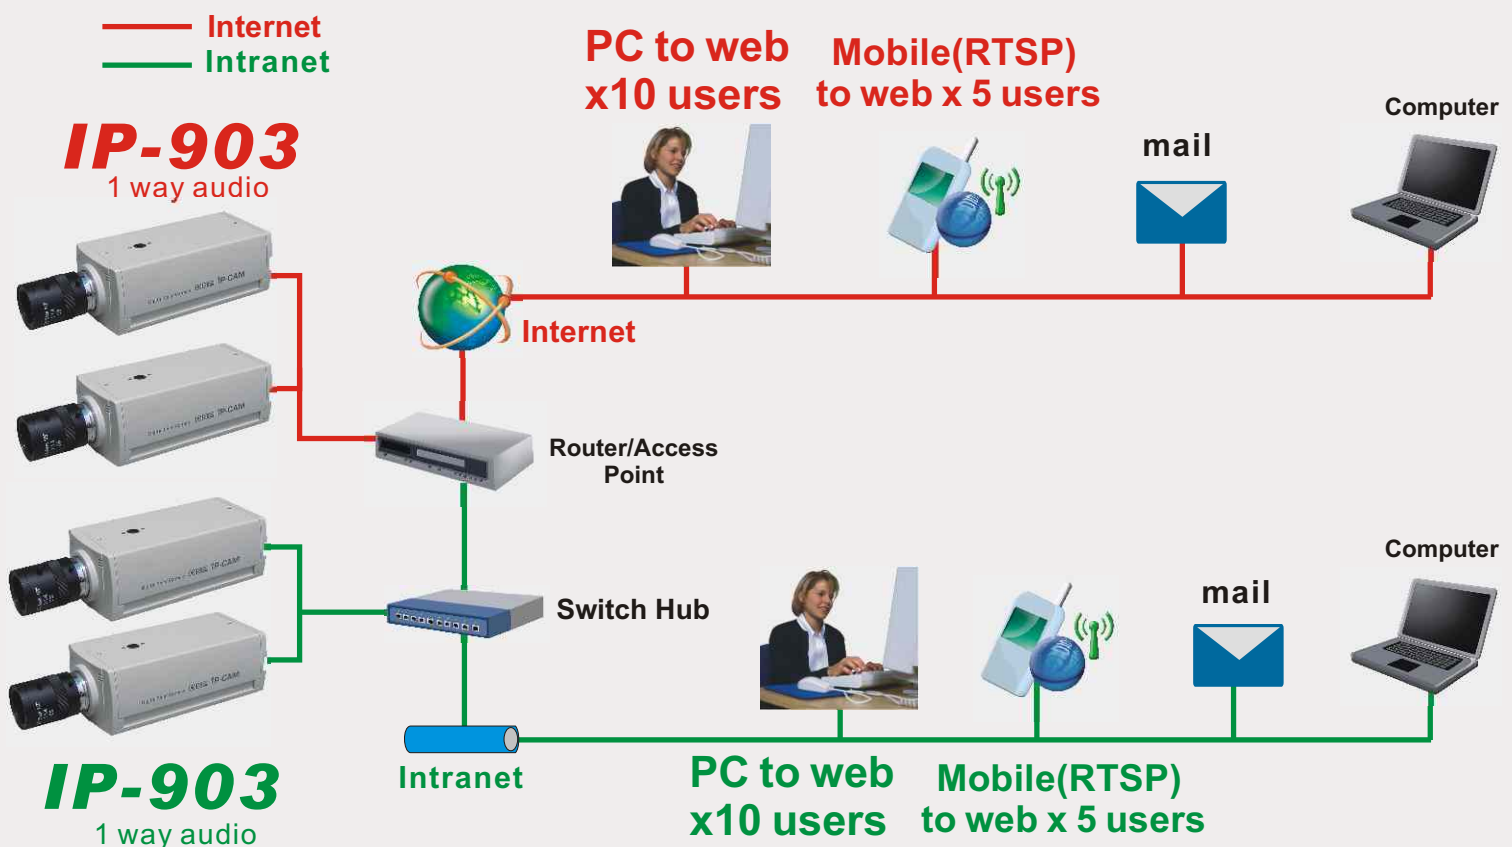

IP-903

REAR PANEL

- ① RJ45 Jack
- ② DC12V IN
- ③ Video output(BNC)

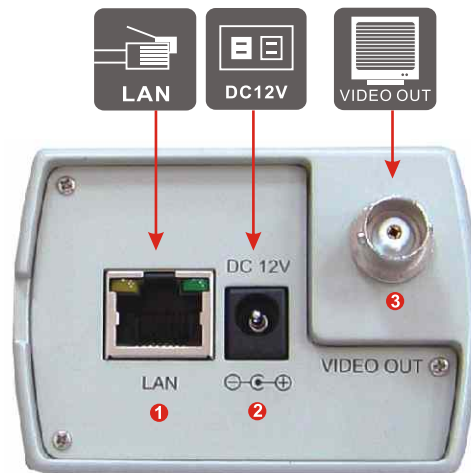

Specification

| | | |
|-------------------------|---|------------------------|
| Camera type | Compatible with BT.656 · 28.63636MHz for NTSC · 28.375MHz for PAL | |
| LENS | Support C/CS Mount | |
| Compression | MPEG4 / JPEG | |
| Client View | NTSC | PAL |
| (Resolution/Frame Rate) | D1 : 720x480 / 30 | D1 : 720x576 / 25 |
| | CIF : 360x240 / 30 | CIF : 360x288 / 25 |
| | Half-D1 : 720x240 / 30 | Half-D1 : 720x288 / 25 |
| | QCIF : 180x120 / 30 | QCIF : 180x144 / 25 |
| Network Protocol | TCP/UDP/IP, DHCP,SMTP, HTTP, NTP,DDNS,FTP,TFTP,ARP,nPn,PPPoE | |
| Transmission Format | MPEG-4 video stream with 1 way PCM audio | |
| Recorded format | MPEG-4 video stream with 1 way PCM audio | |
| Motion Detection | Movement on image | |
| Controller Interface | Internet Explorer 5.0 or above | |
| Setup via IE | CAMERA : AES · BLC · AGC · MIRROR | |
| | Network : IP Configure · PPPoE · DDNS | |
| | Video : Resolution · Frame Rare · Compression Rate · P/I Rate | |
| | Audio on/off | |
| | Update Firmware | |
| Memory | 2M Byte Flash ROM / 8M Byte SDRAM / 32M Byte DDR | |
| Network | 10/100 Ethernet | |
| Audio | Built-in high performance Microphone ranges within 5 meters | |
| I/O Ports | Power input · RJ45 network port · Video Output port | |
| Dimensions | 158.5mm (L) × 70mm (W) × 50mm (H) (without lens) | |
| Weight | About 380 g | |
| Power Supply | DC 12V / 500mA | |
| Operating Temperature | 5° C ~ 40° C | |
| Storage Temperature | 0° C ~ 70° C | |
| Operating Humidity | 10%~80% | |