



友聯商業機械有限公司™
Union Business Machines Co., Ltd.

NIDEKA®

NU-2602


Fingerprint Time & Attendance Recorder with Access Control


2.8" True Color TFT LCD
Metallic Design





For Sales Enquiries:
Union Business Machines Co., Ltd.
Tel: +852 2745 1342
Fax: +852 2310 2699
Email: sales@union-business.com
Website: www.union-business.com


Features


- 
Highly Accurate Fingerprint Recognition:
 Optical fingerprint sensor with scratch resistant surface


- 
Lightning Fast Fingerprint Recognition:
 "Tick Tock", a second, you are either rejected or accepted by our NU-2602


- 
Smart Fingerprint Update:
 Automatically analyze the tiny difference of the latest fingerprints vs the previous fingerprints and update accordingly to ensure the high accuracy and the optimum speed of fingerprint recognition

- 
Ultra Low False Acceptance Rate:
 One in a million attempts, there may be a false acceptance happened. Nevertheless, it is a "may".
 In other words, FAR ≤ 0.0001%

- 
Data Communication Channel:
 Data transfer via RS485, USB Link, USB Disk, SD Card, TCP/IP

- 
Multiple Authentication Method:
 Fingerprint + EM Card + PIN, Fingerprint + EM Card, Fingerprint + PIN, EM Card + PIN

- 
Flexible Time Period Recording:
 Regular: In/Out, Overtime: In/Out time, Out of Office: In/Out time recording


- 
Door Access Control:
 Support 50 time zones of door access, every staff can assign 5 different time zones for door access.

Specifications


Platform	AS603
Algorithm	SmackFinger v3.0
Dimensions	L165 x W130 x H45 (mm)
Operation	Offline
Power Supply	DC9V/DC5V
Authentication Methods	Fingerprint, Password, EM Card (Optional)
Fingerprint Verification Mode	1:1, 1:N
Fingerprint Sensor Area	16 x 14 (mm)
Verification Speed	≤ 1.2s
Max. Fingerprint Records	1,000
Max. Management Records	10,000
Max. Attendance Records	100,000
Display	2.8" TFT True Color LCD 320 x 240 pixels
Display Language	English / Traditional Chinese / Simplified Chinese / Others (Optional)
Smart FP Update	Yes
Attendance Record Check	Press OK Button for Checking
Time Bell	Yes
Door Access Control	Yes (Optional)
Backup Battery	≤ 4 Hours (Optional)
Interface	USB Link, SD Card
	RS485 (Optional)
	USB Disk (Optional)
	TCP/IP (Optional)
Proximity Card	Wiegand 26/34 bits with 1 In & 1 Out (Optional)
Proximity Card	EM Card / MIFARE Card (Optional)

Connection Diagram


➤ Uploading / Downloading Data vis SD Card

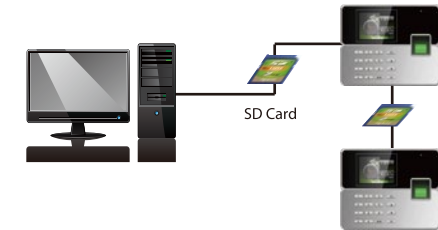

➤ Connecting to Server via LAN / WAN

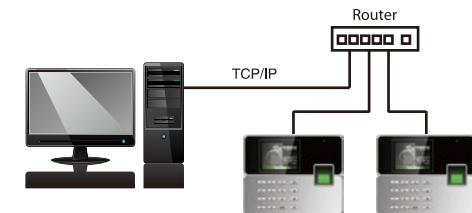

➤ Connecting to Server via USB Cable

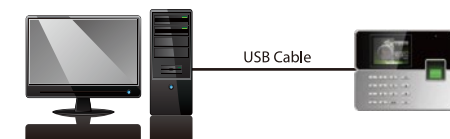

Distributor: