

T-58

Fingerprint Time & Attendance Recorder

LED Indicator

2.8" Color TFT Display

With Elegant Design



USB Link



Personal
Identity Number



TCP/IP



EM Card



Backup
Battery



Door
Opening



RS485

For Sales Enquiries:

Union Business Machines Co., Ltd.

Tel: +852 2745 1342

Fax: +852 2786 4647

Email: sales@union-business.com

Website: www.union-business.com

T-58

Fingerprint Time & Attendance Recorder

Features



Highly Accurate Fingerprint Recognition:
Optical fingerprint sensor with scratch resistant surface



Lightning Fast Fingerprint Recognition:
"Tick Tock", a second, you are either rejected or accepted by our TX-66



Smart Fingerprint Update:
Automatically analyze the tiny difference of the latest fingerprints vs the previous fingerprints and update accordingly to ensure the high accuracy and the optimum speed of fingerprint recognition



Ultra Low False Acceptance Rate:
One in a million attempts, there may be a false acceptance happened. Nevertheless, it is a "may".
In other words, $FAR \leq 0.0001\%$



SD Card for Data Upload / Download:
The most commonly used data storage device, SD Card, is employed in our TX-66 for easy data transfer




Data Communication Channel:
Data transfer via USB Link, USB Disk, RS485, TCP/IP

Specifications:


Dimensions	L178 x W128 x H50 (mm)
Operation Mode	Online
Operation Voltage	DC 9V
Authentication	Fingerprint + PIN + RFID (Optional)
Fingerprint Verification Mode	1:1, 1:N
Fingerprint Sensor Area	16 x 14 (mm)
Verification Speed	$\leq 1.2s$
Max. Fingerprint Records	3,000
Max. Transaction Records	100,000
Max Management Records	1,000
Display	320 x 240 pixels LCD Display
Display Language	English / Simplified Chinese / Traditional Chinese / Other Languages (Optional)
Fingerprint Update	Yes
Time Bell	Yes
Door Lock Control	Yes
Backup Battery	≤ 4 Hours (Optional)
Interface	USB Link, USB Disk RS485 TCP/IP RS232 (Optional)
Proximity Card	EM Card / MIFARE Card (Optional)

Data Communication:


➤ Uploading / Downloading Data vis SD Card

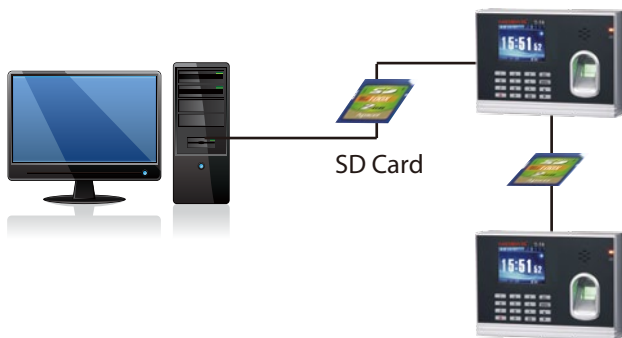

➤ Connecting to Server via LAN / WAN

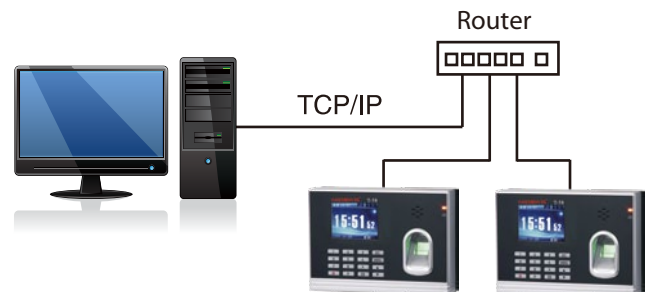

➤ Connecting to Server via USB Cable

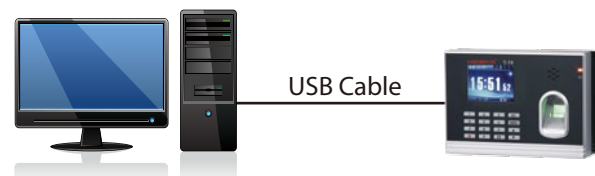

Distributor: